



DSC-A/ASS LOAD CELL

LCT SENSOR

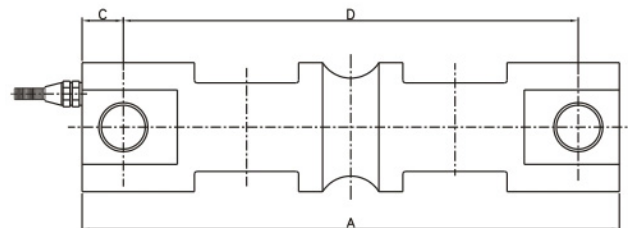

量程 (kg)	尺寸 (inch)								
	A	B	C	D	E	F	G	H	I
5, 10	8.12	5.24	0.62	6.88	0.66	1.70	1.48	1.12	0.50
20, 25	8.12	5.24	0.62	6.88	0.66	1.95	1.48	1.12	0.50
30, 50 60, 75	10.25	6.48	0.88	8.50	1.06	3.00	2.73	2.37	1.00
100	11.25	7.48	0.88	9.50	1.06	3.50	3.24	2.50	1.5

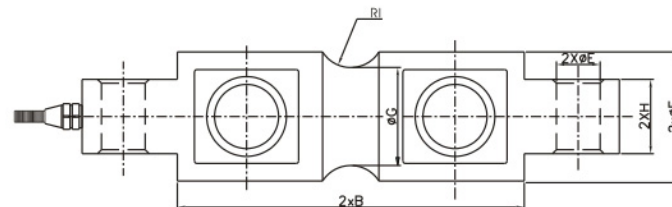

汽车衡、地上衡、仓储秤等

Truck scale, floor scale, warehouse scale

TECHNICAL PARAMETER

额定载荷 Rated capacities(Emax)	5, 10, 20, 25, 30, 50, 60, 75, 100klb;	温度补偿范围 Temperature range, compensated	-10℃~+40℃
灵敏度 Sensitivity	3.0±0.003mV/V;	工作温度范围 Temperature range, operating	-30~+70℃
综合误差 Total error	±0.03%F.S; ±0.05%F.S	安全过载 Maximum safe overload	150%F.S
蠕变(30分钟)Creep error (30min)	±0.02%F.S	极限过载 Ultimate overload	250%F.S
零点平衡 Zero balance	±1%F.S	推荐激励电压 Excitation, recommend	10~12V DC
零点温度影响 TCO	±0.02%F.S/10℃	最大激励电压 Excitation, maximum	15V DC
输出温度影响 TC SPAN	±0.02%F.S/10℃	防封等级 Protection class	IP68
输入阻抗 Input impedance	750±10Ω	材质 Construction	合金钢Alloy Steel 不锈钢Stainless Steel
输出阻抗 Output impedance	702±3Ω; 703±5Ω (L≥15m)	电缆 Cable Length=L: 8m(5, 10klb), 12m(20~75klb, 20t), 16m(100klb)	
绝缘电阻 Insulation impedance	≥5000MΩ	Diameter: φ 5mm(5~10klb), φ 6mm(20~100klb)	